

EJOT® self-drilling fasteners

JT2-LH6 5.5 x L range



Case hardened steel fastener light section low profile framing fastener.

Application Features

- For light steel framing connections
- For steel structures with a combined thickness of up to 6.0mm
- Where the minimum head height dimension is required

Material Specification

- High quality case hardened low carbon steel manufactured in accordance with BS EN ISO 10666
- Organic corrosion resistant finish

Performance Details

Ultimate Fastener Tensile Strength

Fastener Diameter	kN
5.5 x L	14.50

Ultimate Fastener Shear Strength

Fastener Diameter	kN
5.5 x L	9.60

Ultimate Pullout Load kN

Fastener Diameter	Nominal Steel Thickness (mm)		
	3.00	5.00	6.00
5.5 x L	5.40	10.80	14.50*






*Mode of failure for ultimate pullout from 5-6mm thickness plus steel is limited by the ultimate tensile strength of the fastener.

Figures based on tests from construction grade steel up to 3.0mm thick designated as S350GD (BS EN 10346), minimum yield strength 350 N/mm². Steel 4.0mm and thicker designated as grade S275 (BS EN 10025), minimum yield strength 275 N/mm².

Ultimate Pullover Load kN

Washer Face	Nominal Steel Thickness (mm)		
	0.50	0.70	0.90
Unwashed	-	6.10	7.20

Figures based on use with R38 profile steel sheets with fastener located in valley of profile.

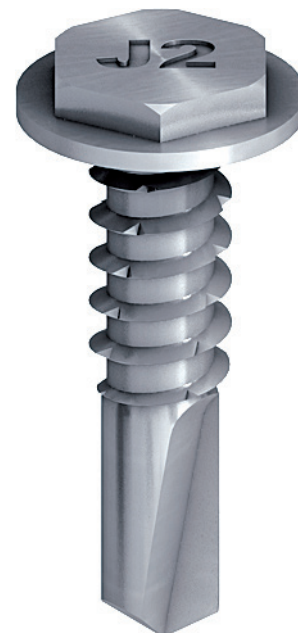

Drive Tool



Self-drilling fastener range

Figures shown on this data sheet are based on results obtained from tests carried out in EJOT UK's Applitec laboratory in accordance with equipment conforming to current industry standards, on a random sample of fasteners manufactured to EJOT tolerances. Information supplied should form part of a general guide and should performance data for a specific application be required please do not hesitate to contact us.

EJOT UK Ltd, Hurricane Close, Sherburn-in-Elmet, Leeds LS25 6PB.