

DDS 7.3 x L range

Carbon steel fastener with zinc plating coating.
For fixing insulation and acoustic boards to concrete soffits.


Application Features

- For fixing insulation systems to ceilings
- Steel anchor – no relaxation
- Fast and simple installation
- Only 25mm embedment – reduced impact on reinforcement
- No expansion – favourable with pre-stressed concrete beams
- Can be used with separate DDT-70 galvanised steel spreader washer
- 25mm diameter head, with integral UV stabilised nylon head

Material Specification

- Carbon steel with a corrosion resistant duplex coating
Classification for environmental categories C1 - C2
- Hole diameter: 6mm
- Embedment: 25mm
- Hole depth: 35mm
- One piece anchor
- Tensile strength in concrete C20/25 - C50/60 : Design resistance 0.5kN
On-site testing recommended to confirm site specific requirements

Installation

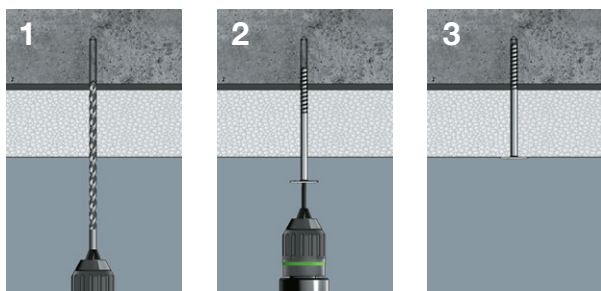

Drive Tool



Self-tapping
fastener range

Figures shown on this data sheet are based on results obtained from tests carried out in EJOT UK's Applitec laboratory in accordance with equipment conforming to current industry standards, on a random sample of fasteners manufactured to EJOT tolerances. Information supplied should form part of a general guide and should performance data for a specific application be required please do not hesitate to contact us.