

EJOT® Rooflight Stitching

Expanding EPDM Fastener -RLS25 Range

Components


A2 Grade Stainless Steel M5
Metric Bolt with 8mm Hex Head
(Also available with a
COLORFAST (CF19) Colour
Coded Nylon Head on a stainless
steel bolt)

EPDM Rubber Grommet with
Threaded Brass Insert

Stainless Steel EPDM Sealing
Washer in 19mm or 29mm Diameter

Product

Compression Zone
(As Metric bolt is driven
compression zone
expands to form a water-
tight seal)

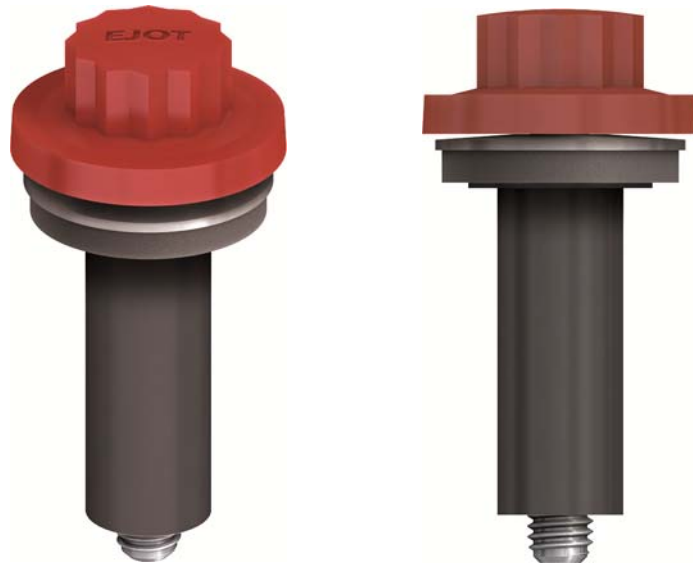

Installation

(a) The fastener requires a hole drilling in the Rooflight in a manner detailed by the individual Rooflight manufacturer, this hole to be between 9.7mm and 10.0mm in diameter.

(b) The fastener must then be installed by hand (Wrench/socket/hand driver) and **NOT BY electric/battery powered screwgun** (tightened to a maximum setting torque of 1.5 N.m to avoid breaking the bond between the EPDM Rubber and the Nut) we recommend seal testing with the EJOT VACUtester.

All parts shown are manufactured to EJOT specifications and tolerances and subject to change without prior notification

EJOT The Quality
Connection