


Installation instructions

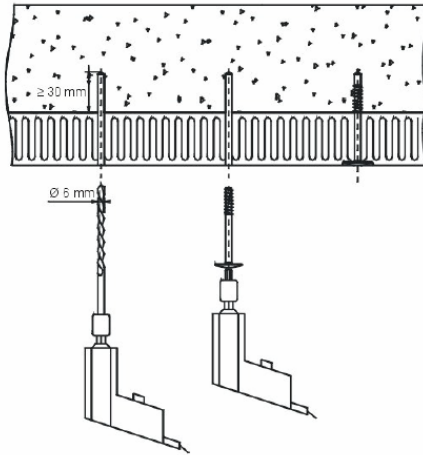

Drilling:

Drill perpendicular to the surface

- Drill diameter: 6mm
- Drill depth: 30mm
- Drive : Torx® T30
- Embedment depth : 20mm

Push the fastener through the insulation board into the pre-drilled hole and drive the fastener with a standard screwgun (EJOT TE1) depth or torque controlled.

Product range.

Insulation Thickness	Screw length	Product Code	Packaging	Article number	
				White	Beige
mm	mm		(pcs/Box)		
30	50	DDS 7.3 x 50	100	18419 05 0740	18419 05 0780
55	75	DDS 7.3 x 75	100	18419 07 5740	18419 07 5780
80	100	DDS 7.3 x 100	100	18419 10 0740	18419 10 0780
105	125	DDS 7.3 x 125	100	18419 12 5740	18419 12 5780
130	150	DDS 7.3 x 150	100	18419 15 0740	18419 15 0780
155	175	DDS 7.3 x 175	100	18419 17 5740	18419 17 5780
180	200	DDS 7.3 x 200	100	18419 20 0740	18419 20 0780

For Further Information Please Contact:

**EJOT U.K. Limited, Hurricane Close, Sherburn Enterprise Park,
 Sherburn-in-Elmet, Leeds, LS25 6PB. Tel: 01977 68 70 40 Fax: 01977 68 70 41**