


## Material Specification

High quality Stainless steel  
grade 304 St/St, ISO group  
A2, Din Werkstoff 1.4301.



## Head Style

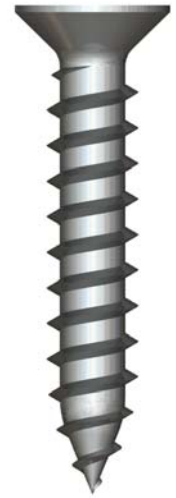


TORX<sup>®</sup>  
T30 recess

### Ultimate Fastener Tensile Strength



Fastener Dia	kN
6.5 x L	17.50

### Ultimate Fastener Shear Strength



Fastener Dia	kN
6.5 x L	13.40

### Ultimate Pullout Load kN



Fastener Dia	Steel Thickness (mm)				Alu Thickness (mm)	
	1.20	1.50	1.60	2.00	1.90	3.00
6.5 x L						
Pilot Hole (mm)	4.50	4.50	4.50	5.00	4.50	4.50
Pullout Load (kN)	3.00	4.00	4.20	5.35	1.61	2.95

Figures in taken from steel designated grade Z35 (BS 2989) minimum yield strength 350Nmm<sup>-2</sup>, Aluminium manufactured in accordance with BS 1470 SIC 1987.

Figures above are based on results obtained from tests carried out in our Applitec lab in accordance with equipment conforming to BS 5427 on a random sample of fasteners manufactured to EJOT tolerances. Information supplied should form part of a general guide and should performance data for a specific application be required please do not hesitate to contact us.

EJOT UK Limited Sherburn-in-Elmet, Leeds LS25 6PB.  
Tel: 01977 687040 Fax: 01977 687041  
www.ejot.co.uk info@ejot.co.uk