

EJOT® HTK-75-2G

75mm Diameter tubewasher for bonded/mechanical hybrid installations

EJOT®




EJOT® tube washer HTK 2G 75

Combines with Dabo® HTK and TKR fasteners


Since EJOT® introduced the intelligent tubewasher / fastener combination design, our range has grown to provide the complete mechanical fix solution.

Now, EJOT UK has developed a 75mm diameter tubewasher which meets the SPRA guidelines for bonded/mechanical hybrid installations.

Made to the same exacting standards as its 50mm counterpart, the NEW HTK-2G-75 tubewasher expands our range to the most complete from any single manufacturer.

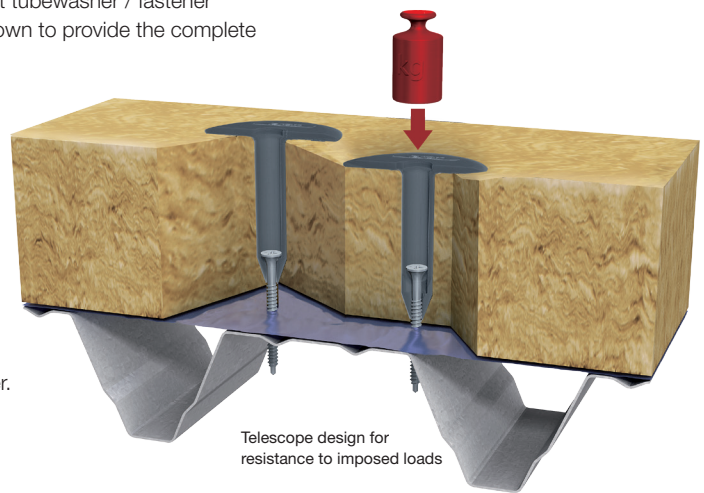

Approval
ETA-07/0013



Application area:

- Combines with appropriate fastener to secure insulation to steel profiles and plywood decks
- For use where the membrane layer will be adhesive-bonded to the insulation surface
- For new buildings and renovations
- Meets SPRA guidelines for resistance to imposed loads
- Limits cold bridging

Properties:

- High-grade plastic material
- Telescope design for resistance to imposed loads
- Available loose or pre-assembled with fastener

Note

For combination with EJOT Dabo® screws TKR and TKE




The Quality Connection
www.ejot.co.uk

EJOT® tube washer HTK 2G 75 Combines with Dabo® TKR fasteners

Ordering HTK 75 2G / TKR combination

For fixing membrane and insulation to timber deck

Ø x L (mm)	HTK Length (mm)	TKR Length (mm)	Insulation Thickness (mm)	Drive Bit (mm)	Min Qty
60-35/70	35	70	60	z 100mm	100
70-35/80	35	80	70	P2 100mm	100
80-55/70	55	70	80	P2 100mm	100
90-55/80	55	80	90	P2 100mm	100
100-55/90	55	90	100	P2 100mm	100
110-55/100	55	100	110	P2 100mm	100
120-95/70	95	70	120	P2 150mm	100
130-95/80	95	80	130	P2 150mm	100
140-95/90	95	90	140	P2 150mm	100
150-95/100	95	100	150	P2 150mm	100
160-95/110	95	110	160	P2 150mm	100
170-45/70	145	70	170	P2 200mm	100
180-145/80	145	80	180	P2 200mm	100
190-145/90	145	90	190	P2 200mm	100
200-145/100	145	100	200	P2 200mm	100
210-145/110	145	110	210	P2 200mm	100
220-145/120	145	120	220	P2 200mm	100
230-145/130	145	130	230	P2 200mm	100
240-145/140	145	140	240	P2 200mm	100
250-145/150	145	150	250	P2 200mm	100



Application


Insulation back to ply deck
Thermally broken fastener/washer combination for minimal cold bridging.

Different combinations available,
please call our sales team on **01977 687 040**

Ordering HTK 75 2G / TKR combination

For fixing membrane and insulation to steel deck

Ø x L (mm)	HTK Length (mm)	TKR Length (mm)	Insulation Thickness (mm)	Drive Bit (mm)	Min Qty
60-35/50	35	50	60	P2 100mm	100
70-35/60	35	60	70	P2 100mm	100
80-55/50	55	50	80	P2 100mm	100
90-55/60	55	60	90	P2 100mm	100
100-55/70	55	70	100	P2 100mm	100
110-55/80	55	80	110	P2 100mm	100
120-95/50	95	50	120	P2 150mm	100
130-95/60	95	60	130	P2 150mm	100
140-95/70	95	70	140	P2 150mm	100
150-95/80	95	80	150	P2 150mm	100
160-95/90	95	90	160	P2 150mm	100
170-45/50	145	50	170	P2 200mm	100
180-145/60	145	60	180	P2 200mm	100
190-145/70	145	70	190	P2 200mm	100
200-145/80	145	80	200	P2 200mm	100
210-145/90	145	90	210	P2 200mm	100
220-145/100	145	100	220	P2 200mm	100
230-145/110	145	110	230	P2 200mm	100
240-145/120	145	120	240	P2 200mm	100
250-145/130	145	130	250	P2 200mm	100
260-145/140	145	140	260	P2 200mm	100

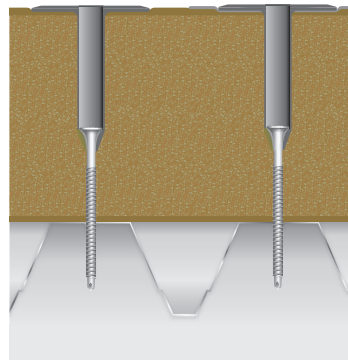

Application

Insulation back to 0.7mm - 1.2mm steel deck.
Thermally broken fastener/washer combination for minimal cold bridging.

Different combinations available,
please call our sales team on **01977 687 040**



HTK-2G-75 meets guidelines set out by SPRA, relating to the bonded installation of single ply membrane systems.

Hurricane Close, Sherburn-in-Elmet, Leeds LS25 6PB.

Tel: 01977 687040 Fax: 01977 687041

Email: info@ejot.co.uk

EJOT®

The Quality Connection

www.ejot.co.uk