

Sinusoidal suction cup




Rubber sinusoidal suction cup for air-seal testing of installed self-drilling / self-tapping fasteners

Application Features

- For air-seal testing of installed self-drilling / self-tapping fasteners
- For use on sinusoidal 13.5-3 profiles
- Checks the airtight seal of low-profile FR style fasteners
- Primary function is to test seal in valley fix applications
- Can also be used to seal test crown applications
- For use in conjunction with the EJOT VACUtest kit

Material Specification

- High quality elastomer

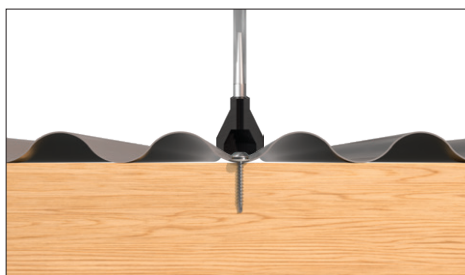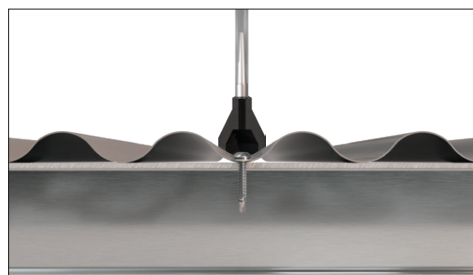

Figures shown on this data sheet are based on results obtained from tests carried out in EJOT UK's Applitec laboratory in accordance with equipment conforming to current industry standards, on a random sample of fasteners manufactured to EJOT tolerances. Information supplied should form part of a general guide and should performance data for a specific application be required please do not hesitate to contact us.