

Case hardened steel fastener for fixing roofing or cladding steel sheets or steel to steel from 1.5mm - 6.0mm in thickness.

Application Features

- For steel structures 1.5mm - 6.0mm in thickness
- Can be used in conjunction with A15 and A19 aluminium/EPDM vulcanised sealing washers
- 8mm hex

Material Specification

- High quality case hardened low carbon steel manufactured in accordance with BS EN ISO 10666
- Organic corrosion resistant finish



Performance Details

Ultimate Fastener Tensile Strength

Fastener Diameter	kN
5.5 x L	14.50

Ultimate Fastener Shear Strength

Fastener Diameter	kN
5.5 x L	9.60

Ultimate Pullout Load kN


Fastener Diameter	Nominal Steel Thickness (mm)		
	3.00	5.00	6.00
5.5 x L	5.40	10.80	12.50

Figures based on tests from construction grade steel up to 3.0mm thick designated as S350GD (BS EN 10346), minimum yield strength 350 N/mm². Steel 4.0mm and thicker designated as grade S275 (BS EN 10025), minimum yield strength 275 N/mm².

Ultimate Pullover Load kN

Washer Face	Nominal Steel Thickness (mm)			
	0.50	0.70	0.90	1.20
A15 Washer	3.52	4.62	5.72	-
A19 Washer	3.74	5.33	6.91	9.28

Figures based on use with R38 profile steel sheets with fastener located in valley of profile.

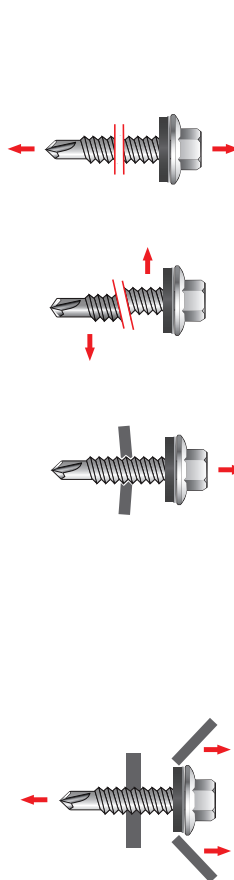

Drive Tool

8mm Hex

Self-drilling fastener range

Certifications



ETA-10/0200



Figures shown on this data sheet are based on results obtained from tests carried out in EJOT UK's Applitec laboratory in accordance with equipment conforming to current industry standards, on a random sample of fasteners manufactured to EJOT tolerances. Information supplied should form part of a general guide and should performance data for a specific application be required please do not hesitate to contact us.